


**SECTION A-A**  
WITH PLYWOOD COVER  
AND MACHINE SCREWS

FAA TYPE	NOM DIA	MMC TYPE	'ODT'	'IDT'	'BC'	'IDC'	'ODB'
L-867B	12"	127CC	13.500	9.250	10.250	12.250	13.000
L-867D	16"	167CC	17.375	12.375	14.250	16.250	17.375
L-867E	24"	247CC	24.000	20.000	21.500	22.500	24.000

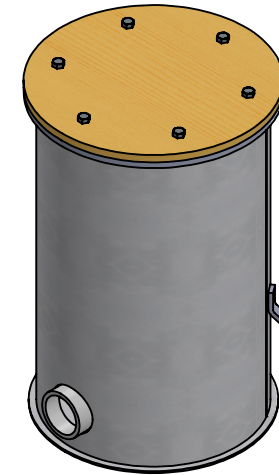

**NOTE:**

1. 24" IS THE STANDARD HEIGHT; OTHER HEIGHTS ARE AVAILABLE.
2. TAPPED HOLE PATTERN IN TOP FLANGE IS ALIGNED WITH CENTERLINE OF COUPLINGS.
3. Ø2" COUPLINGS ARE ORIENTED 180° APART. OTHER HOLE LOCATIONS AND/OR SIZES MUST BE SPECIFIED WHEN ORDERING.
4. THREADS INSIDE THE COUPLINGS ARE PROTECTED WITH LDPE PLUGS.
5. PLYWOOD COVER IS 1/2" NOMINAL THICKNESS, GRADE CC.
6. A COPPER GROUND LUG IS INCLUDED.
7. CARBON STEEL BASES ARE HOT DIP GALVANIZED PER ASTM A 123.
8. AVAILABLE OPTIONS, SPECIFIED WHEN ORDERING, INCLUDE:
  - DRAIN COUPLING
  - STAINLESS STEEL CONSTRUCTION
  - REPLACEABLE STAINLESS STEEL THREADED INSERTS
9. THIS PRODUCT IS CERTIFIED PER FAA ADVISORY CIRCULAR AC150/5345-42 (CURRENT REV).

DWN: DOUG F.	<b>L-867 LIGHT BASE WITH COUPLINGS</b>	
DATE: 1/18/2019		
SCALE: NTS	 <b>MILLERBERND</b>	622 6TH ST. SO. WINSTED, MN 55395
SHEET 1 OF 1		